


ErgoGrip

ErgoGrip is a heavy-duty anti-fatigue mat that features a 12.7mm dense foam cushion encapsulated in nitrile rubber, making it suitable for both wet and dry environments. Offering exceptional anti-fatigue benefits, the gripper backing minimises movement on the floor, whilst the textured surface and bevelled borders maximise safety. ErgoGrip is a totally versatile mat, is welding safe and resistant to chemicals, animal fats, machine grease/oils and petroleum products.

Features

- **Typical applications:** Ideal for use in heavy duty industrial applications including welding areas and static sensitive areas.
- **Material:** Nitrile rubber.
- **Cleaning:** Rinse with a hose or pressure washer. Hang or lay the mat flat to dry.
- **Sustainability:** REACH compliant.
- **Warranty:** Lifetime.

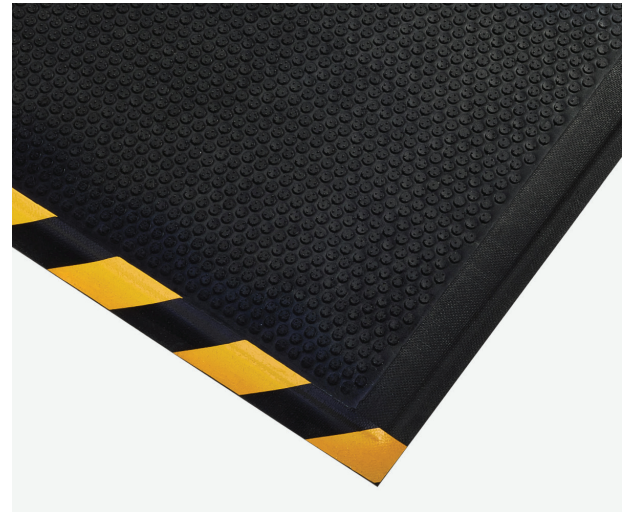

| Code | Metric | Imperial | Thickness | Weight | Colour |
|-----------|--------------|----------|-----------|--------|--------------|
| 06-0208-1 | 58cm x 85cm | 2' x 3' | 12mm | 4.9kg | Black |
| 06-0208-3 | 58cm x 85cm | 2' x 3' | 12mm | 4.9kg | Black/Yellow |
| 06-0208-2 | 85cm x 150cm | 3' x 5' | 12mm | 11.4kg | Black |
| 06-0208-4 | 85cm x 150cm | 3' x 5' | 12mm | 11.4kg | Black/Yellow |

Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

ErgoGrip

Technical Specification

| | |
|-----------------------|---|
| Slip resistant: | Excellent slip resistance to level 3 |
| Anti-fatigue: | Excellent anti-fatigue properties, resistant to level 3 |
| Wear resistant: | Excellent wear resistance to level 3, suitable for heavy footfall |
| Chemical resistant: | Yes |
| Disability friendly: | Yes, the mats have ramped edges making them suitable for wheelchair users |
| Dry area: | Yes |
| Wet area: | Yes |
| Oily and greasy area: | Yes |
| Heavy area: | Yes |
| Welding area: | Yes |
| Environment: | Suitable for indoor and outdoor use |
| Flame retardant: | Yes |
| Non-static (ESD): | Yes |
| Product testing: | <ul style="list-style-type: none"> ■ Certified high-traction by the National Floor Safety Institute (NFSI) ■ DUROMETER: 65 ■ Tensile strength: 1600 PSI ■ Textured Nitrile Rubber Surface for superior slip resistance ASTM C 1028-96 ■ Static Coefficient of Friction: Dry-.92 Wet-.86 ■ Electrostatic Propensity of Carpets: Maximum Negative 0,7kv ■ Passes Flammability Standard DOC-FF-1-70.Passes ATTCC Test Method 134-1996 |
| Sustainability: | REACH (Registration, Evaluation, Authorisation and Restrictions of Chemicals) |
| UV resistant: | Yes, the solid nitril rubber surface provides UV resistance |
| Cleaning: | Rinse with a hose or pressure washer. Hang or lay the mat flat to dry |