


# TackyGuard Pro

TackyGuard Pro has been designed to help prevent contamination from entering controlled working environments. The mat features an anti-microbial adhesive surface which helps remove dust and dirt from footwear or wheeled trolleys. TackyGuard Pro is formed of 30 peel-off layers, making it perfect for maintaining clean room and laboratory standards. The overall thickness is 2mm and the bottom of the mat securely adheres to any clean, dry surface. Sold in packs of four, TackyGuard Pro can be used for a wide variety of applications, from data centres, medical, pharmaceutical, electronics, aerospace, instrumentation, nuclear to construction environments.

## Features

- Typical applications:** Perfect for maintaining clean room and laboratory standards. Can also be used for operating theatres, intensive care units, data centres and pharmaceutical, electronics, aerospace, instrumentation, nuclear and construction environments.
- Material:** Polyethylene film coated with acrylic (water solvable) adhesive.
- Cleaning:** Simply peel off the top layer to reveal a clean layer below.
- Warranty:** Lifetime.

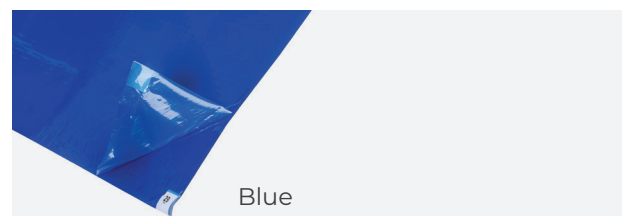

Suitable for indoor use

Code	Metric	Imperial	Thickness	Weight	Per	Colour
06-0334-1	48cm x 110cm	2' x 4'	2mm	5.5kg	(pack of 4)	Blue
06-0334-2	48cm x 110cm	2' x 4'	2mm	5.5kg	(pack of 4)	White
06-0334-3	60cm x 90cm	2' x 3'	2mm	5.9kg	(pack of 4)	Blue
06-0334-4	60cm x 90cm	2' x 3'	2mm	5.9kg	(pack of 4)	White
06-0334-5	90cm x 150cm	3' x 5'	2mm	14.7kg	(pack of 4)	Blue
06-0334-6	90cm x 150cm	3' x 5'	2mm	14.7kg	(pack of 4)	White

Please note, the width/length can be +/- 2%  
 Please note, all Imperial sizes have either been rounded up or down to the nearest whole number

# TackyGuard Pro

## Technical Specification

Slip resistant:	Great slip resistance to level 2
Wear resistant:	Great wear resistance to level 2, suitable for medium to high footfall
Anti-microbial:	Yes, contains 2-n-octyl-4-isothiazolin-3-one (OIT)
Disability friendly:	Yes, the low profile makes it suitable for wheelchair users
Dry area:	Yes
Wheeled area:	Yes
Medical area:	Yes
Environment:	Suitable for indoor use
Product testing:	<ul style="list-style-type: none"><li>■ Peel adhesion in accordance with CSN EN ISO 1939 0,48 (N/10mm)</li><li>■ Tensile strength (LD) in accordance with CSN EN ISO 527-1.3 - 28 MPa (+-0,7)</li><li>■ Tensile strength (TD) in accordance with CSN EN ISO 527-1.3 - 18,3MPa (+-0,6)</li></ul>
Cleaning:	Simply peel off the top layer to reveal a clean layer below